





UNITED ARAB EMIRATES MINISTRY OF CLIMATE CHANGE & ENVIRONMENT مـــؤتـــمــر عــجــمـــان الـدولي السادس للـبـيـئـة Ajman 6th International Environment Conference

AC/DC technology is revolutionizing controlled environment agriculture in desert ecosystems

TOWARDS>>> 2071 SHAPING THE FOR ENVIORMENTAL Arash Nejatian¹, Abdul Aziz Niane¹, Vinay Nangia¹, Amal Hassan Al Ahmadi², Tahra Saeed Ali Mohamed Naqbi², Haliema Yousif Hassan Ibrahim², Mohamed Ahmed Hamdan Al Dhanhani²

- 1. The International Center for Agricultural Research in the Dry Areas (ICARDA)
 - 2. Ministry of Climate Change and Environment, United Arab Emirates



Desert farming system challenges

- Little to no rainfall,
- Sandy soils with low organic matter and water holding potential,
- Extreme temperatures and scorching winds,
- Heavy dependence on often non-renewable groundwater.

Make up 1/3rd of the land's surface area, deserts are a source of livelihood for millions of people Environment Conference




Control environment agriculture is the main pillar of desert farming

Protecting crops from the harsh environment and enhancing and managing crop production throughout the year.

The main technical problem of using conventional greenhouses:


- maintaining the inside air temperatures and relative humidity favorable for plant growth under a desert farming system (Abdel-Ghany & Al-Helal, 2020)
- High water and energy consumption for plant production and cooling system

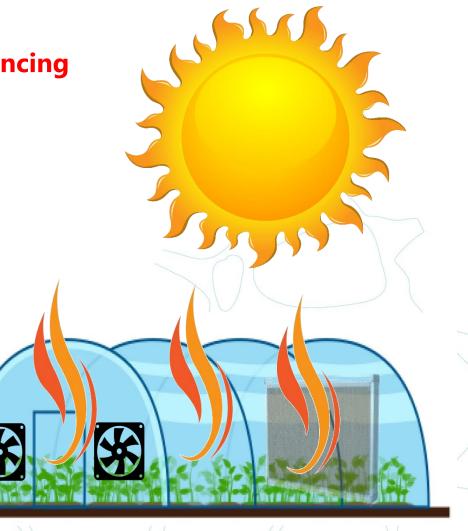

Simplified Closed Soilless Production System

Reduce irrigation water by more than 50%



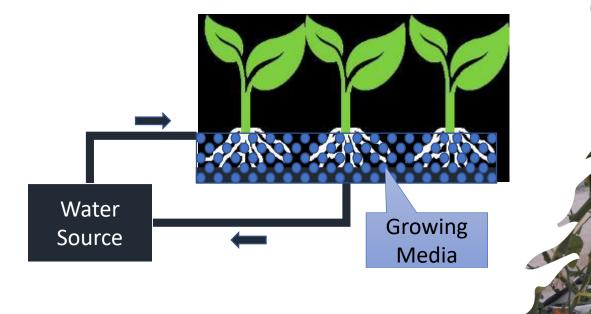






The evaporation cooling system (pad and fan) is widely used

W However its efficiency is low because of:

- The high humidity and head accumulation under the plastic cover
- Requires large amounts of water and energy.

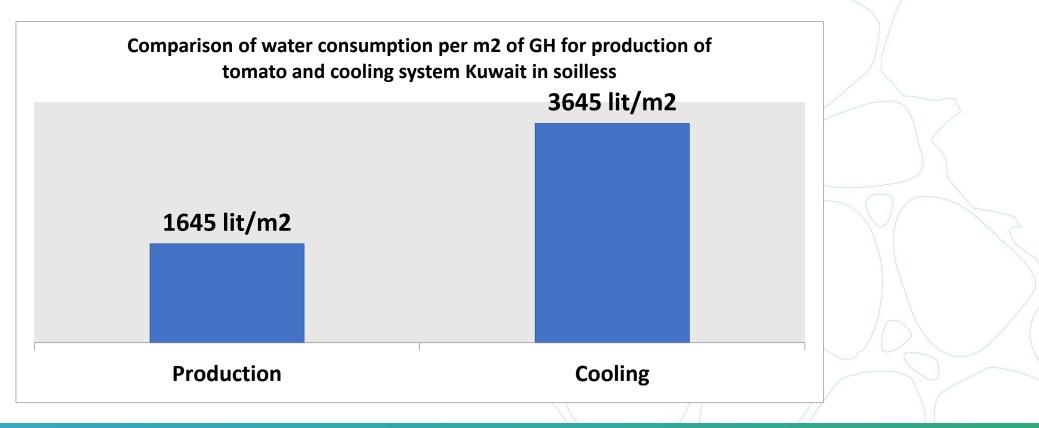



Insect-proof net-house

Considering the average monthly temperature, the production of cash crops could be successful in net-house for 7-8 months/year.

Comparing cucumber production in Net-house VS. Cooled GH in UAE (September to December 2012)

11.0 10.5 10.0 9.5 9.0 8.5 8.0 7.5 7.0 6.5 6.0 Cooled GH Net house

Average Yield (kg/m2)



الدولي السادس للبيئة Ajman 6th International


Environment Conference



Root zone area cooling (RZAC)

The air temperature inside the greenhouse tends to be very high during the daytime. The root zone cooling system has been used as an energy-efficient cooling system for GH to overcome this problem

- Niam & Suhardiyanto, 2018;
- Lyr & Garbe, 1995;
- Lahti et al., 2005;
- Solfjeld & Johnsen, 2006;
- Diaz-Perez et al., 2007;
- Nxawe et al., 2009

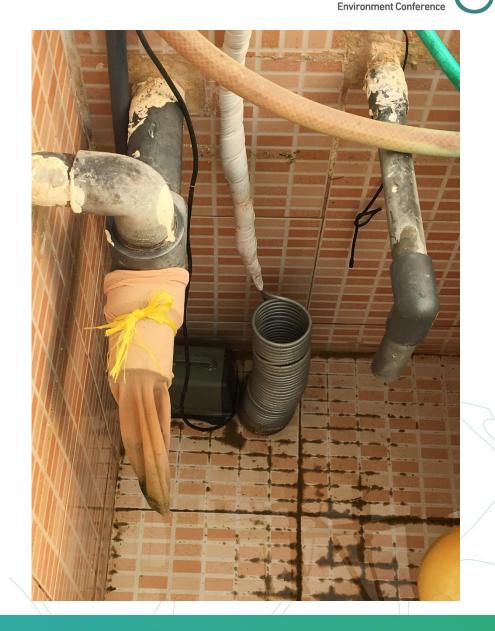


مــــؤتـــمـــر عـــجــمـــان الـدولي السادس للـبـيئـة Ajman 6th International



Ultra-low-energy drippers with hybrid on grid solar energy

ICARDA-MIT research on the new emitters showed reduction on pumping energy by 80%,

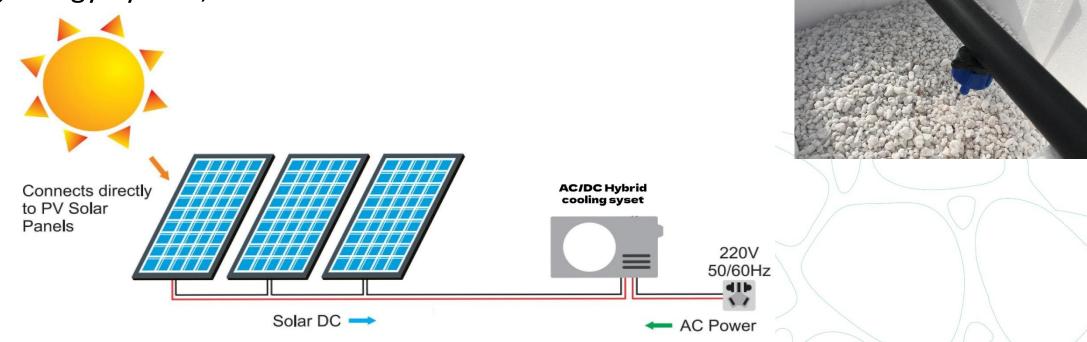

مـــؤتـــمــر عـــجــمـــان الـدولي السادس للـبـيـئـة Ajman 6th International Environment Conference

The on-grid component of the AC/DC hybrid starts when the energy from the solar panel is low



Combination of five technology packages with cumulative effects

This study aimed at looking into the cumulative effects of a five-technology combination on productivity and on extending the production period of crops under net house without air cooling

- closed soilless production system,
- Insect proof net house,
- ultra-low-pressure drippers,
- root zone area cooling,
- and low-cost solar energy,.




Setting up the experiment

- Three hydroponics greenhouse (8x30m) in Al-Dhaid research station, were selected.
- Two covered with insect-proof net (net-house) and one with polycarbonate.
- The fertigation in all three greenhouses controlled by an automatic start/stop device
- Irrigation in the net-house with RZAC powered 100% by solar energy
- Irrigation water in the experimental net houses maintained at 25 °C using a hybrid solar energy system



Ajman 6th International Environment Conference

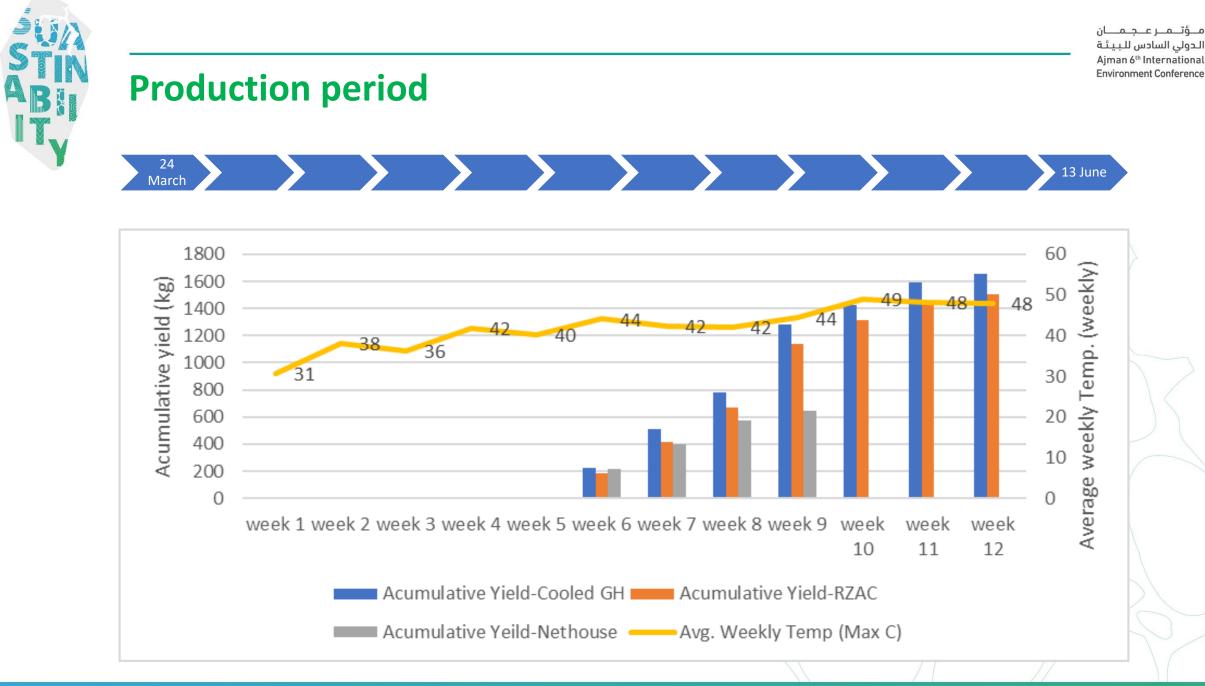



Comparison of cucumber yield under Net house with RZAC and Cooled GH

- Each of the structures was divided into seven sections in length.
- Each section had 70 pots and 140 plants.
- The production records of each section were collected separately and used as different samples to compare each structure's average yield and water productivity using independent samples t-test.

| | production (kg/m2) | production (kg/m2) |
|-----------|--------------------|--------------------|
| Section 1 | 7.13 | 6.18 |
| Section 2 | 6.49 | 7.24 |
| Section 3 | 6.14 | 7.94 |
| Section 4 | 6.07 | 7.41 |
| Section 5 | 5.82 | 7.24 |
| Section 6 | 6.46 | 6.42 |
| Section 7 | 6.14 | 6.21 |
| Total | 6.32 | 6.95 |


Aiman 6th International

The independent two-tail t-test for equal variance proved no significant yield between cooled-GH and NH-RZAC



Water Use Efficiency (kg/m3) in the net house with RZAC and conventional cooled greenhouse

- Both structures used about 40m³ of water for crop irrigation and fertigation
- The cooled GH consumed an extra 176.85m³ of water for the cooling system.

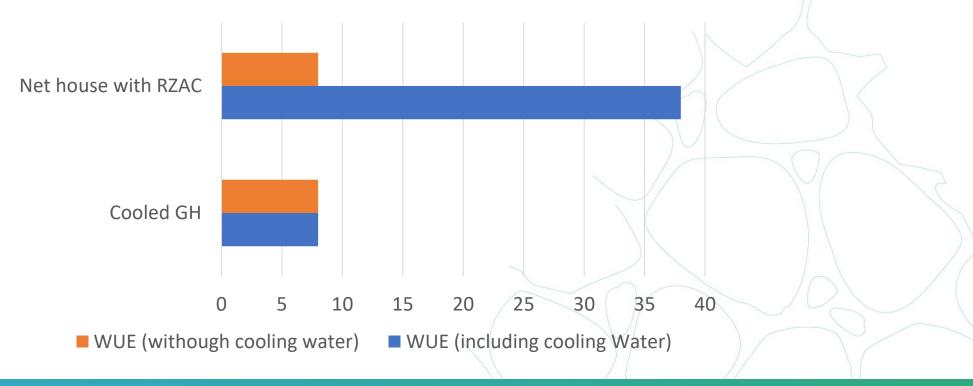

Environment Conference



Economic analysis

Machinery and depreciation

Estimated cost of establishment and equipment

| | Establishn | nent cost | Economic | Annua | l cost |
|--------------------------------|-----------------|-----------------|-------------|-----------|---------|
| | cooled GH | NH-RZAC | life (year) | cooled GH | NH-RZAC |
| Greenhouse structure | 40000 | 25000 | 10 | 4000 | 2500 |
| Irrigation system | 2930 | 2015 | 5 | 586 | 403 |
| Root Zone Cooling | 0 | 7000 | 5 | 0 | 1400 |
| cooling system | 10000 | 0 | 5 | 2000 | 0 |
| Hydroponics system | 3000 | 3000 | 5 | 600 | 600 |
| Total | 55930 | 37015 | | 7186 | 4903 |
| Cost per season (4 seasons for | cooled GH and 3 | seasons for the | net house) | 1797 | 1634 |

Net house with RZAC and solar energy reduce establishment cost and depreciation with about 10%



Economic analysis

Energy :

| Electricity consumption (kWh) | | | |
|-------------------------------|---------|--|--|
| 6950 | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | 300 | | |
| COOLED GH | NH-RZAC | | |

- Save 95% of electricity consumption
- Saves annually about 4AED/m2

Environment: Less electricity means less carbon footprint.

The 6650-kWh saving is equivalent to 4.7 metric tons of Co2 not emitted to the atmosphere. This is equal to a co2 generated by a small car run for one year (EPA, 2020)






م_ؤت_م_ ع_ح_م_



Economic analysis

<u>Water</u>

Overall, the NT-RZAC saved water costs by more than 5 folds.

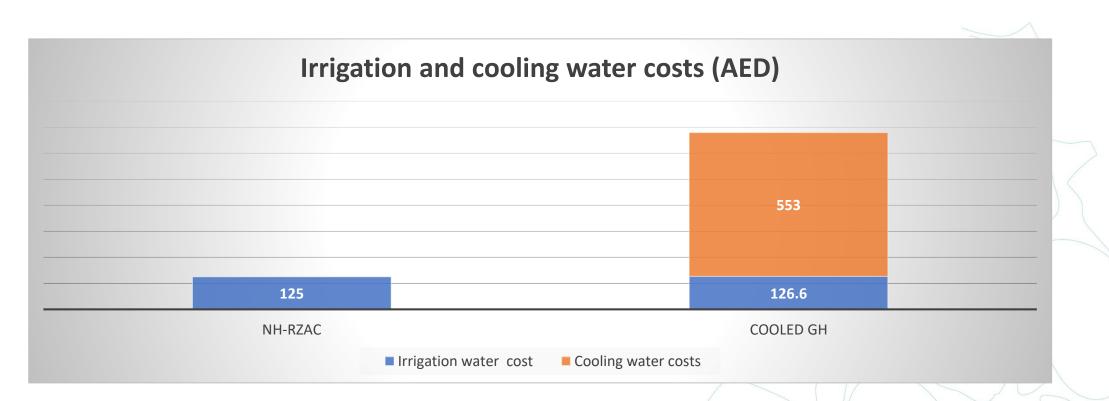

The Water cost is 3.13 AED/m³ as agricultural water tariff (Abu Dhabi Distribution Company, 2017).



Partial budget analysis

| | Cooled GH | NH-RZAC |
|------------------------------------|-----------|---------|
| Seeds | 180 | 180 |
| Total fertilizer | 225 | 225 |
| Total pesticides | 50 | 50 |
| Labor | 500 | 500 |
| Energy | 302 | 14 |
| Machinery (including depreciation) | 1797 | 1634 |
| Water | 680 | 126 |
| Total Cost | 3733 | 2729 |
| Total revenue | 6614 | 6019 |
| Net return | 2881 | 3290 |

compared to the conventional cooled greenhouse, utilizing net house with RZAC powered by solar energy

- reduced the total cost of production by 27%
- increased net income by about 14%



Conclusion

from this study findings, it can be stated that utilizing the AC\DC hybrid on-grid solar energy combined with four other proven technologies shows promising results for improving the yield, water productivity, and production period of cucumber crop under net house compared to the conventional pad and fan greenhouses in desert farming system.

eliminating the pad and fan cooling system, the combination reduced

- energy consumption by up to 95%
- water by 80%, mainly by.
- No quantitative or qualitative yield penalties were observed.



THANK YOU

A I E C 2 O 2 2 | W W W . A I E C . A E